



HYC-639



Microprocessor Controller



Forced Air Cooling
With Auto Defrost



Safe Monitoring

Pharmacy Refrigerator

Scope of Application

Used for storage of medicines, vaccines, reagents, biological products and other items that require a temperature between 2-8°C in hospitals, pharmacies, pharmaceutical factories, clinics and laboratories etc.

Innovative Design

- Purpose-built for medical and laboratory use
- High performance with low noise level
- Eco-friendly and energy saving
- Condensation free even at ambient 32°C & 80% RH
- Convenient monitoring and data export



AWTech
Advanced Worldwide Technologies



127566 Россия, Москва,
Алтуфьевское шоссе, дом 48, корпус 1
+7 (499) 346-74-93
info@awt.ru
www.haierus.ru

Группа компаний AWTech – официальный партнер Haier Biomedical.
Официальный дистрибьютор на территории Российской Федерации.
Приглашаем к сотрудничеству коммерческие организации


Product Advantages

-  Eco-friendly hydrocarbon refrigerant (R600a) and CFC-free polyurethane insulation for reduced global warming potential
-  Microprocessor controller, digital display with 0.1°C resolution for accurate control
-  Hermetically sealed compressor, forced-air circulation with auto defrost to ensure high cooling performance to keep cabinet temperature between 2~8°C
-  Self-closing door with magnetic gaskets to ensure a positive seal
-  Double-layer tempered glass door with electronic heater to reduce condensation even at 32°C, 80% RH ambient
-  Multiple alarm functions for safer monitoring, audible/visual alert with mute function; remote alarm contacts as standard in rear of the unit
-  Convenient security with a top-mounted unique-key lock as well as a hasp for padlock
-  Easy to check the min/max temperature in the past 24 hours
-  Adjustable plastic-coated wire shelves for improved circulation and flexible storage
-  Energy efficient interior LED lighting
-  25mm probe access port to accept user-provided monitoring equipment
-  Optional USB, optional printer, optional RS 485
-  Dish bottom design to contain spills
-  4 swivel casters with 2 leveling feet


Product Parts




Product Dimension

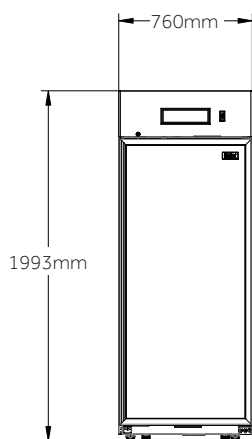

Front view

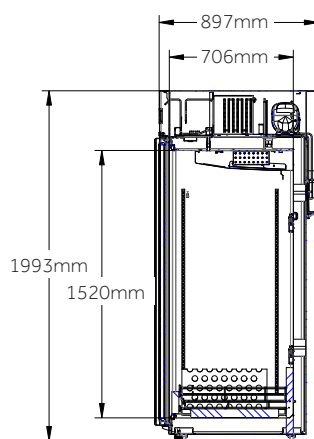

Side view

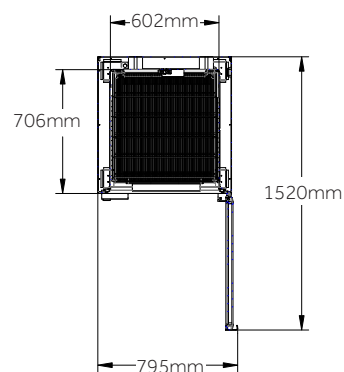

Top view

Specifications



Model			HYC-639	
Technical Data	Cabinet Type		Upright, Single Door	
	Climate Class		ST	
	Cooling Type		Forced Air Cooling	
	Defrost Mode		Auto	
	Refrigerant		HC	
	Sound Level (dB(A))		43	
Performance	Temperature Range (°C)		2~8	
Control	Controller		Microprocessor	
	Display		LED	
Electrical Data	Power Supply (V/Hz)		220~240/50	
	Electrical Current (A)		2.15	
Dimensions	Capacity (L/Cu.Ft)		639/22.6	
	Net/Gross Weight (approx)	kg	200/240	
		lbs	551.15/639.33	
	Interior Dimensions (W*D*H)	mm	620*706*1520	
		in	24.4*27.8*59.8	
	Exterior Dimensions (W*D*H)	mm	760*897*1993	
		in	29.9*35.3*78.5	
	Packing Dimensions (W*D*H)	mm	910*1030*2170	
		in	35.8*40.6*85.4	
Alarms	Container Load (20'/40'/40'H)		12/24/24	
	High/Low Temperature		Y	
	Remote Alarm		Y	
	Power Failure		Y	
	Sensor Error		Y	
	Low Battery		Y	
	Door Ajar		Y	
Accessories	Caster		Y/4	
	Foot		Y/2	
	Porthole		Y	
	Shelves/Drawers		4/-	
	USB Interface		Y	
	Printer		Optional	
Others	Certification		CE, UKCA	

*Haier Biomedical reserves the right to change products and specifications without prior notice.